



OmniVac

Surface Analysis and Vacuum Technology

Z-Manipulators

ZM 50/75/100



ZM50/75/100 Z-Manipulators come with CF40 mounting and traveling flange and standard z-translations of 50, 75 or 100 mm. Their sturdy design allow for easy operation.

50, 75 or 100 Z-Range

tilt option available

CF 40 mounting and traveling flange

other flange sizes available

www.omnivac.de


ZM 50/75/100 Z-Manipulators

ZM 50/75/100 Z-Manipulators come with CF40 mounting and traveling flange and standard z-translations of 50, 75 or 100 mm.

Their sturdy design allow for easy operation.

Optionally, different modifications are available like integrated tilt, CF63 mounting flange or CF16 mounting and traveling flange.

tilt option

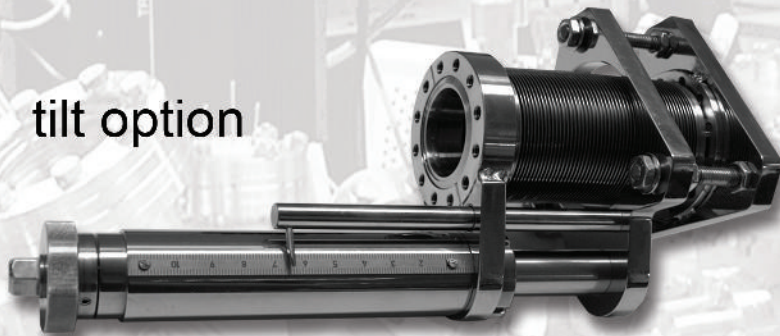

- ▶ CF63 mounting flange
- ▶ CF 40 traveling flange
- ▶ tilt option
- ▶ CF16 mounting and traveling flange



standard

<i>Design</i>	CF40 mounting and traveling flange
<i>Range</i>	50, 75 or 100 mm
<i>Resolution</i>	0.5 mm (manual)
<i>Repeatability</i>	0.5 mm (manual)



OmniVac
Hertelsbrunnenring 30
D-67657 Kaiserslautern / Germany

Tel +49 (0) 631 3110740
Fax +49 (0) 631 28056
sales@omnivac.de